


Viking™ 3 terminal blocks with screw connection

for copper cables

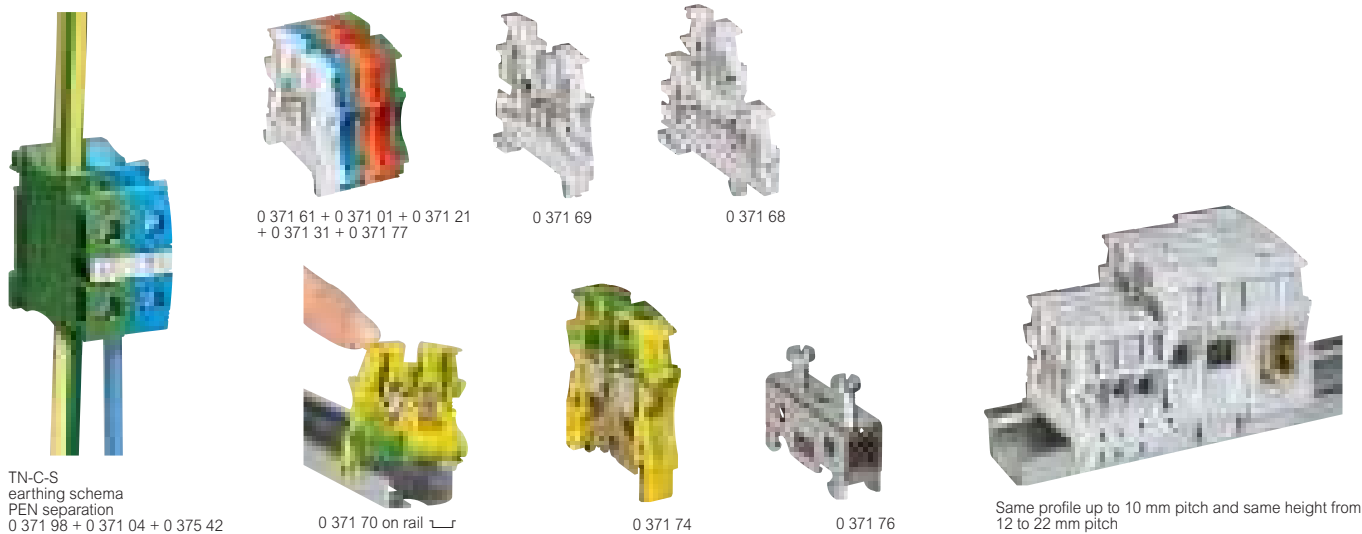

TN-C-S earthing schema
PEN separation
0 371 98 + 0 371 04 + 0 375 42

0 371 61 + 0 371 01 + 0 371 21
+ 0 371 31 + 0 371 77

0 371 69

0 371 68

0 371 70 on rail

0 371 74

0 371 76

Same profile up to 10 mm pitch and same height from 12 to 22 mm pitch

Technical characteristics **p. 335** dimensions **see e-catalogue**
Approvals **p. 919**

Used to make the electrical connection between 2 flexible copper wires with or without ferrules or 2 rigid copper wires
2 areas for automatic insertion bridging combs up to 8 pitch (upper level only for multi-level blocks)
For rails depth 15 mm, EN 60715 depth 7.5 mm and 15 mm

Pack	Cat.Nos	Connecting	Capacity			Pitch (mm)
		Colour	Nominal cross-section (mm ²)	Rigid wire (mm ²)	Flexible wire (mm ²) with or without ferrules	
		Grey for standard circuit, blue for neutral conductor, orange for circuit not broken by the master isolating device, red for special circuits (safety, protected, etc), green for protection conductor class II equivalent assemblies				
		1 connection - 1 entry/1 outlet				
60	0 371 60	Grey	2.5	0.25 to 4	0.25 to 2.5	5
60	0 371 00	Blue				
60	0 371 20	Orange				
60	0 371 30	Red				
50	0 371 61	Grey	4	0.25 to 6	0.25 to 4	6
50	0 371 01	Blue				
50	0 371 21	Orange				
50	0 371 31	Red				
50	0 371 77	Green				
40	0 371 62	Grey	6	0.5 to 10	0.25 to 6	8
40	0 371 02	Blue				
40	0 371 78	Green				
30	0 371 63	Grey	10	1.5 to 16	2.5 to 10	10
30	0 371 03	Blue				
20	0 371 64	Grey	16	1.5 to 25	4 to 16	12
20	0 371 04	Blue				
20	0 371 98	Green				
20	0 371 65	Grey				
20	0 371 05	Blue	35	2.5 to 50	4 to 35	15
20	0 371 99	Green				
10	0 371 66 ¹	Grey	70	25 to 95	16 to 70	22
		1 connection - 2 entries/2 outlets				
25	0 371 69	Grey	4	0.25 to 6	0.25 to 4	6
25	0 371 09	Blue				
		2 connections on 2 levels				
60	0 371 67	Grey	2.5	0.25 to 4	0.25 to 2.5	5
60	0 371 07	Blue				
60	0 371 68	Grey	4	0.25 to 6	0.25 to 4	6
60	0 371 08	Blue				
		3 connections on 3 levels				
50	0 371 51 ²	Grey	2.5	0.25 to 4	0.25 to 2.5	5

Pack	Cat.Nos	For protection conductor	Capacity			Pitch (mm)
		Colour	Nominal cross-section (mm ²)	Rigid wire (mm ²)	Flexible wire (mm ²) with or without ferrules	
		Metal base				
		1 connection - 1 entry/1 outlet				
		Screwless fixing on rail up to 10 mm pitch and with screws for pitch 12 and 15 mm PEN from 10 mm ²				
60	0 371 70	Green/yellow	2.5	0.25 to 4	0.25 to 2.5	5
50	0 371 71	Green/yellow	4	0.25 to 6	0.25 to 4	6
40	0 371 72	Green/yellow	6	0.5 to 10	0.25 to 6	8
30	0 371 73	Green/yellow	10	1.5 to 16	2.5 to 10	10
10	0 371 74	Green/yellow	16	1.5 to 25	4 to 16	12
10	0 371 75	Green/yellow	35	2.5 to 50	4 to 35	15
		1 connection - bare block				
10	0 371 76	-	35	2.5 to 50	4 to 35	15
		1 connection - 2 entries/2 outlets				
		Screwless fixing on rail				
50	0 371 79	Green/yellow	4	0.25 to 6	0.25 to 4	6
		PNE - Phase/Neutral/Earth				
		3 connections on 3 levels				
		Metal base				
		Green/yellow marking for the lower level				
		Screwless fixing on rail				
50	0 371 52 ²	Grey	2.5	0.25 to 4	0.25 to 2.5	5


1: Built-in end cap
2: Rigid wire capacity: 2.5 mm² max. with equipotential bridging comb

Viking 3 power terminal blocks
p. 338

CAB 3 marking system
p. 342

Viking™ 3 terminal blocks with screw connection

for copper cables (continued)

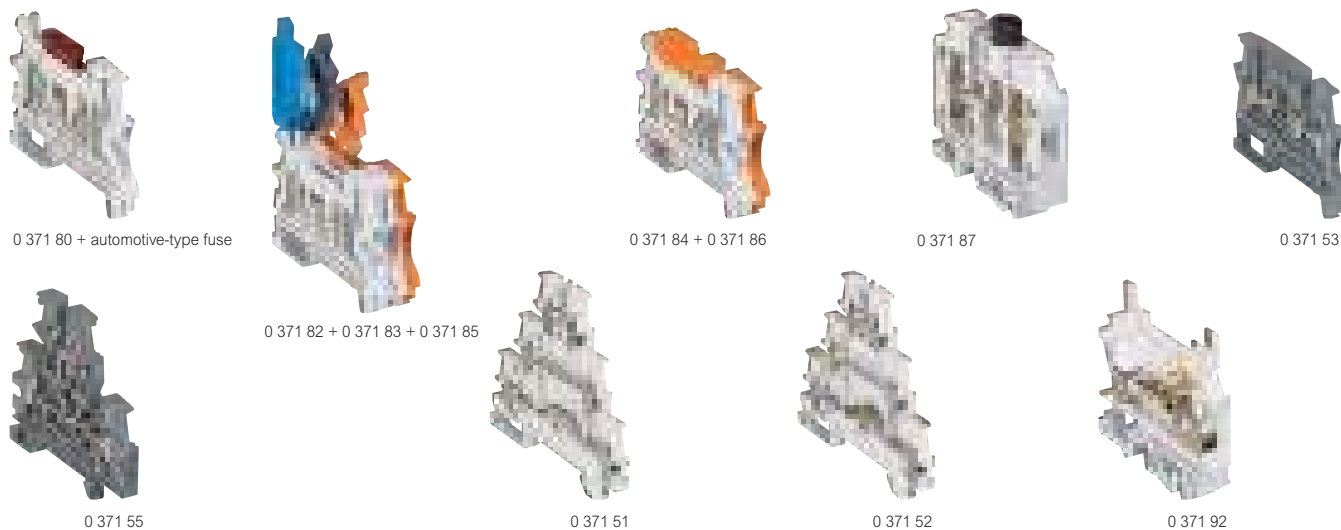

Technical characteristics **p. 335** dimensions **see e-catalogue**
 Approvals **p. 919**

Used to make the electrical connection between 2 flexible copper wires with or without ferrules or 2 rigid copper wires
 2 areas for automatic insertion bridging combs up to 8 pitch (upper level only for multi-level blocks)
 For rails depth 15 mm, EN 60715 depth 7.5 mm and 15 mm

Pack	Cat.Nos	Disconnect terminal blocks 1 connection				
		Opening by means of blade type lever, handle lever or mini lever (with tool)				
		Open (to be equipped)				
		Can take blade type levers Cat.Nos 0 375 15/16/17/18 or in ELV installations a blade-type automotive fuse or a miniature circuit-breaker				
		Colour	Nominal cross-section (mm ²)	Rigid wire (mm ²)	Capacity Flexible wire (mm ²) with or without ferrules	Pitch (mm)
20	0 371 80	Grey	2.5	0.25 to 2.5	0.25 to 2.5	6
20	0 371 81	For fuse cartridge 5 x 20 with handle lever				
20	0 371 82	Grey/blue	2.5	0.25 to 2.5	0.25 to 2.5	6
20	0 371 83	For standard circuit with handle lever				
20	0 371 84	Grey	2.5	0.25 to 2.5	0.25 to 2.5	6
20	0 371 85	For circuit not broken with handle lever				
20	0 371 85	Orange	2.5	0.25 to 2.5	0.25 to 2.5	6
20	0 371 86	For circuit not broken with mini lever				
20	0 371 86	Orange	2.5	0.25 to 2.5	0.25 to 2.5	6
20	0 371 87	For cartridge 5 x 20 with screwed plug				
20	0 371 87	Grey	10	0.25 to 10	0.25 to 10	12

Pack	Cat.Nos	Function blocks				
		1 connection - modular				
		Component connected with screws				
		Colour	Nominal cross-section (mm ²)	Rigid wire (mm ²)	Capacity Flexible wire (mm ²) with or without ferrules	Pitch (mm)
20	0 371 53	Grey	2.5	0.25 to 4	0.25 to 2.5	5
20	0 371 54	1 connection - diode carrier				
60	0 371 55	Grey	4	0.25 to 6	0.25 to 4	6
60	0 371 56	2 connections on 2 levels - with LED				
60	0 371 56	Voltage presence indicator (12/24V _{DC} and ~)				
60	0 371 56	Grey	4	0.25 to 6	0.25 to 4	6

Pack	Cat.Nos	For sensors and actuators				
		For connecting sensors (Cat.No 0 371 51) or actuators (Cat.No 0 371 52), and their shared power supply unit using equipotential bridging comb Cat.Nos 0 375 46/47				
		3 connections on 3 levels - for sensor				
		Colour	Nominal cross-section (mm ²)	Rigid wire (mm ²)	Capacity Flexible wire (mm ²) with or without ferrules	Pitch (mm)
50	0 371 51 ¹	Grey	2.5	0.25 to 4	0.25 to 2.5	5
		3 connections on 3 levels - for actuator				
		Green/yellow marking for the lower level Metal base. Screwless fixing on rail				
50	0 371 52 ¹	Grey	2.5	0.25 to 4	0.25 to 2.5	5
		Disconnect for measurement				
		1 connection				
		With its accessories, allows intervention (measurements, maintenance, etc) on a current, voltage and power measuring circuit by keeping the current transformer secondary circuit closed				
		Colour	Nominal cross-section (mm ²)	Rigid wire (mm ²)	Capacity Flexible wire (mm ²) with or without ferrules	Pitch (mm)
25	0 371 92	Grey	4	0.25 to 4	0.25 to 4	8

1: Rigid wire capacity: 2.5 mm² max with equipotential bridging comb

For detailed dimensions, **see e-catalogue**



Blade type levers, joining rods and blown fuse indicators **p. 333**
 Accessories **p. 332**