


# Legrand cabling system LCS<sup>3</sup> cat. 6<sub>A</sub>

## cables and cords

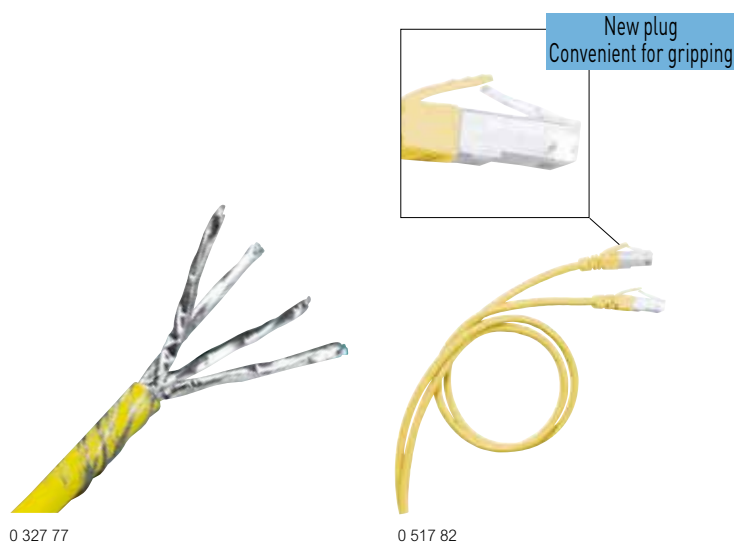

Pack	Cat.Nos	Cables for local networks cat. 6A
500 <sup>1</sup>	0 327 87	<p><b>LSZH</b></p> <p>Cables 4 pairs or 2 x 4 twisted pairs 100 ohms LSZH sleeve: halogen-free Yellow RAL 1018 Colour code TIA/EIA Conform to standards ISO/IEC 11801 Ed. 2.0, EN 50173-1 and TIA/EIA 568C Performance 500 MHz</p> <p><b>U/UTP - 4 pairs</b> Performance 500 MHz Length 500 m Supplied on reel. Weight 25 kg</p>
500 <sup>1</sup>	0 327 78	<p><b>F/UTP - 4 pairs</b> Performance 500 MHz Length 500 m Supplied on reel. Weight 25 kg</p>
500 <sup>1</sup>	0 328 78	<p><b>F/UTP - 2 x 4 pairs</b> Performance 500 MHz Length 500 m Supplied on reel. Weight 65 kg</p>
500 <sup>1</sup>	0 327 77	<p><b>S/FTP - 4 pairs</b> Performance 600 MHz Length 500 m Supplied on reel. Weight 30 kg</p>

1: in metre(s)

Pack	Cat.Nos	RJ 45 patch cords and user cords cat. 6A
1	0 518 82	<p>RJ 45 - RJ 45 right Conform to standards ISO/IEC 11801 Ed. 2.0, EN 50173-1 and TIA/EIA 568C</p> <p><b>U/UTP unshielded impedance 100 Ω</b> Length 1 m</p>
1	0 518 83	Length 2 m
1	0 518 84	Length 3 m
1	0 518 85	Length 5 m
1	0 518 78	<p><b>LSZH</b></p> <p>Length 1 m</p>
1	0 518 79	Length 2 m
1	0 518 80	Length 3 m
1	0 518 81	Length 5 m
1	0 518 74	Length 1 m
1	0 518 75	Length 2 m
1	0 518 76	Length 3 m
1	0 518 77	Length 5 m
1	0 518 16	<p><b>PVC</b></p> <p><b>S/FTP shielded impedance 100 Ω</b> Length 0.5 m</p>
5	0 517 80	Length 1 m
5	0 517 81	Length 2 m
5	0 517 82	Length 3 m
5	0 517 83	Length 5 m
1	0 518 70	<p><b>LSZH</b></p> <p>Length 1 m</p>
1	0 518 71	Length 2 m
1	0 518 72	Length 3 m
1	0 518 73	Length 5 m
1	0 518 66	Length 1 m
1	0 518 67	Length 2 m
1	0 518 68	Length 3 m
1	0 518 69	Length 5 m

# Legrand cabling system LCS<sup>3</sup> cat. 6A

## RJ 45 sockets - Mosaic™ Programme



Can be integrated in all supports (see Legrand general catalog)  
 Mechanisms to be equipped with support frames (see Legrand general catalog) and plates (see Legrand general catalog)  
 With LCS<sup>3</sup> connector with fast connection thanks to integrated crimping take AWG 22 single-core cables up to AWG 26 and AWG multicore cables  
 Contacts marked with dual colour code and wiring schemes T568 A and T 568 B  
 Conform to standards ISO/IEC 11801 Ed. 2.0, amendment 2, EN 50173-1 and TIA/EIA 568 C

Pack	Cat.Nos	Mosaic Programme RJ 45 sockets cat. 6A	Pack	Cat.Nos	Keystone RJ 45 sockets cat. 6A
		<b>STP - 1 module</b> 360° metal shielding	10	0 331 54	STP socket - metal shielding 360° with fast connection thanks to integrated crimping
10	0 765 73	○ White	10	0 331 55	UTP socket - with fast connection thanks to integrated crimping
10	0 765 84	○ White antimicrobial			
10	0 794 73	● Aluminium			
		<b>STP - 2 modules</b> 360° metal shielding			<b>Surface-mounting 1 or 2 ports box</b>
10	0 765 76	○ White	1	6 327 79	For keystone connectors
10	0 794 76	● Aluminium			Provides a solution for the integration of a keystone in surface-mounting installations
10	0 765 24	○ White with green blank			Can be fixed on table or in association with mini-trunking
10	0 765 25	○ White with orange blank			
10	0 765 08	○ White			
		<b>STP with controlled access - 2 modules</b> 360° metal shielding Supplied with 2 keys for 5 sockets			
5	0 765 99	○ White with red blank			
		<b>UTP - 1 module</b>			
10	0 765 71	○ White			
10	0 794 71	● Aluminium			
10	0 765 26	○ White with green blank			
10	0 765 27	○ White with orange blank			
		<b>UTP - 2 modules</b>			
10	0 765 74	○ White			
10	0 794 74	● Aluminium			
		<b>UTP with controlled access - 2 modules</b> Supplied with 2 keys for 5 sockets			
5	0 765 90	○ White with red blank			
10	0 765 09	○ White			