

Legrand cabling system LCS³ cat. 8

cables and cords



0 337 88



0 337 03




0 518 90

Pack	Cat.Nos	
		Cat. 8 local network cables
		4 twisted pair cables, 100 Ω LSOH sheath: without halogens EIA/TIA colour code Compliant with ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards
500'	0 337 86	F/UTP - 4 pairs Performance 2000 MHz Length 500 m supplied on drum. Weight 42 kg
500'	0 337 88	S/FTP - 4 pairs Performance 2000 MHz Length 500 m supplied on drum. Weight 45 kg
		Cat. 8 RJ 45 patch cords
		RJ 45/RJ 45 flat With special "easy grip" plug Compliant with ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards
		S/FTP shielded, impedance 100 Ω
		Length 0.5 m Length 1 m Length 2 m Length 3 m Length 5 m Length 8 m Length 10 m
		LSZH
		RAL 6027
		0 337 01
		0 337 02
		0 337 03
		0 337 04
		0 337 05
		0 337 06
		0 337 07
		LSZH
		RAL 3020
		RAL 6026
1	0 337 21	0 337 08
	0 337 22	0 337 09
	0 337 23	0 337 10
	0 337 24	0 337 11
	0 337 25	0 337 12
	0 337 26	0 337 13
1	0 337 27	0 337 17
		Length 0.5 m Length 1 m Length 2 m Length 3 m Length 5 m Length 8 m Length 10 m
		Marking kit
1	0 518 90	Kit of 200 coloured rings for marking RJ 45 cords Rings to be clipped to the patch cords 1: in metre(s)

Legrand cabling system LCS³ cat. 6_A

flat equipped patch panels

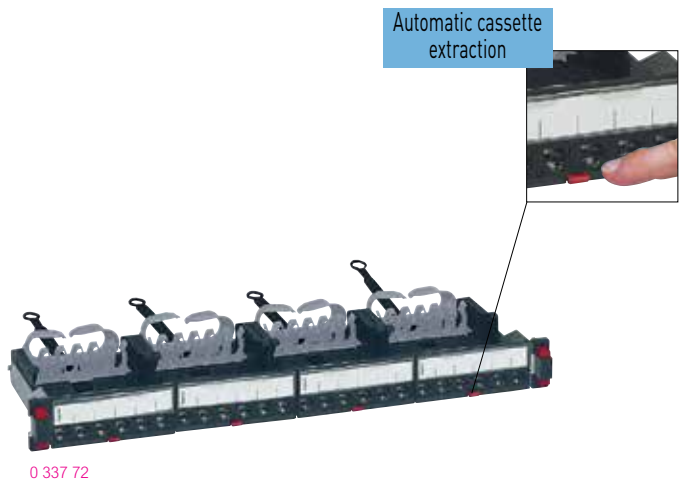

0 337 72

Automatic cassette extraction

Pack	Cat.Nos	
		Cat. 6_A patch panels equipped with 24 RJ 45 connectors
		Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures Universal mounting on any cabinet or enclosure The panels ensure automatic earthing of each connector Equipped with rear cable guide to hold the cables during maintenance Equipped with 4 cassettes of 6 cat. 6 _A RJ 45 LCS ³ quick-connect connectors (no tools required), with 568 A/B marking Supplied with coloured labels Compliant with ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards
		19" panel - 1 U Automatic cassette removal by simple pressure
		Flat panels
		24 RJ 45 connectors - 1 U
1	0 337 70	UTP
1	0 337 72	STP